

PVC izoleli, polyester örgülü, dekoratif kablo

PVC insulated, polyester braided, decorative cable

## DECORATIVE CABLE (Round)

-30°C / +70°C

**DECO**  
Decorative Cables

- 1- İletken: Esnek, tavlı bakır
- 2- İzolasyon: PVC
- 3- İzolasyon: PVC
- 4- Kılıf: Polyester örgü

- 1- Conductor: Flex, red copper
- 2- Insulation: PVC
- 3- Insulation: PVC
- 4- Sheath: Polyester braiding


### Ambalaj



KANGAL

DRUMS

### Packing



ROLLS

MAKARA

### Uygulama Alanları

- Aydınlatmada
- Endüstriyel ve ev tipi aydınlatma ekipmanlarında
- Ev dekorasyon sistemlerinde

### Applications

- Lightning
- Industrial and home type lighting equipment
- Home decorations systems

### Karakteristik Özellikleri

Fiziksel - Kimyasal

- Sürekli çalışma sıcaklığı:

PVC: -30°C / +70°C

Polyester: -50°C / +150°C

### Characteristics

Physical - Chemical

- Continuous working temperature:

PVC: -30°C / +70°C

Polyester: -50°C / +150°C

### Elektriksel ⚡

Elektriksel Çalışma Gerilimi : 300 / 300 V



Test Gerilimi : 2,00 kV

### Electrical ⚡

Working Voltage : 300 / 300 V

Test Voltage : 2,00 kV

ZENGİN RENK SEÇENEKLERİ / SPECIAL COLORS ARE AVAILABLE

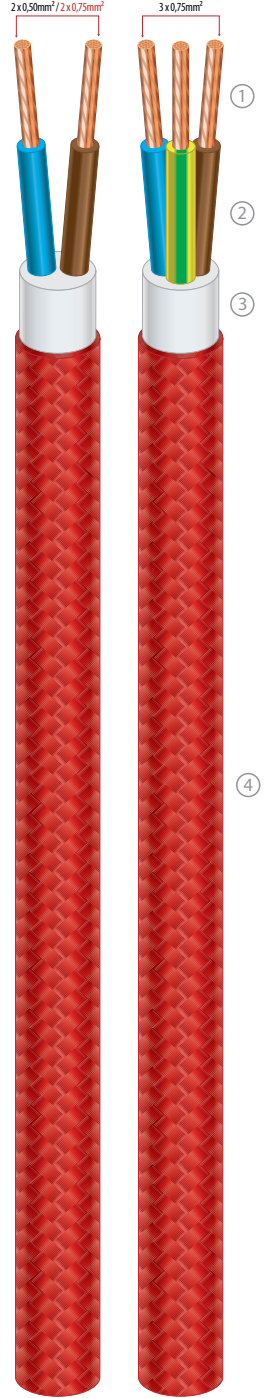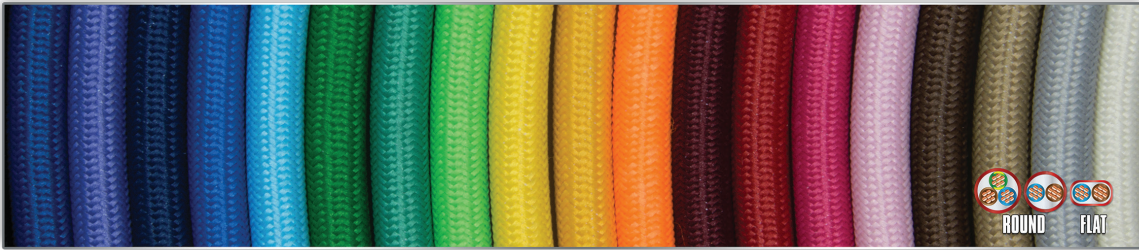

REF	Kesit Cross section mm <sup>2</sup>	Büküm yapısı Stranding construction mm	İzole çapı Insulation diameter mm	PVC kılıf çapı PVC sheath diameter mm	Dış çap Outer diameter mm
H03 DECO CABLES	2 x 0,50	16 x 0,20 ±0,01	1,90	5,10 ±0,20	5,70 ±0,30
H03 DECO CABLES	2 x 0,75	24 x 0,20 ±0,01	2,00	5,30 ±0,20	5,90 ±0,30
H03 DECO CABLES	3 x 0,50	16 x 0,20 ±0,01	1,90	5,60 ±0,20	6,20 ±0,30
H03 DECO CABLES	3 x 0,75	24 x 0,20 ±0,01	2,00	5,80 ±0,20	6,40 ±0,30